



POLARIS Panel PC 15" Professional

Features

- Ethernet interface
- Easy front panel fitting
- Intrinsically safe USB interface
- Graphics-capable TFT colour display
- Direct linkage in explosive areas
- Optional touchscreen
- Optional WLAN
- Siemens PROFIBUS-DP/MPI interface

Description

The Panel PC 15"Professional is based on a fast Intel® Pentium®M processor.

The Ethernet interface can be used to connect individual computers or network devices, e. g. a printer, to an existing local network (LAN) (WLAN is also an optional possibility) or local networks can be set up completely wirelessly.

This facilitates a high-performance visualization and operation of the processes directly on site.

The wired electrical connections are realized via a terminal compartment of the "e" type of protection (increased safety).

The state-of-the-art display technology guarantees an optimum contrast, even with large viewing angle. The front panel fitting assures easy installation. Upon request, the devices are also available as turn-key system solutions in a stainless steel enclosure as wall, floor or ceiling mounting versions.

An intrinsically safe USB interface is available for a USB Ex i memory stick.

Intrinsically safe input devices can be connected also. The optional (intrinsically safe) touchscreen offers the optimum in operating comfort.

As a standard, Windows®XP Professional is pre-installed on the Panel PCs, supporting the installation of numerous software packages such as customer-specific software or other conventional standard visualization software.

Of course, here too the operator can also work with the supplier "BMS-Graf-pro" programming package (Version 7.xxx or newer).

The supplier PROFIBUS-DP interface can only be used in connection with the supplier "BMS-Graf-pro" software.

Explosion protection

Ex protection type

ATEX Ex II 2G Ex db eb qb [ib op pr] IIC T4
Ex II 2D Ex tb IIIC T120°C IP 6X

Certification

IBExU 05 ATEX 1117 X

IECEx

Ex db eb qb [ib] IIC T4
Ex tb IIIC T120°C IP 6X

Certification

IECEx IBE 11.0007 X

Further approvals

INMETRO, GOST-R

Protection class

IP 65 (front side)
IP 54 (rear side)

Technical data

Construction

Front panel fitting

Display

- 15" graphics-capable TFT colour display
- 262,144 colours
- XGA resolution, 1024 x 768 pixels
- Brightness up to 350 cd/m²
- Visible area approx. 304 x 228 mm
- Contrast 400:1
- Antireflection coating glass pane
- Optional touchscreen (resistive)

Backlight illumination

- CFL technology
- Service life approx. 50,000 hours (at +25 °C)

Computer capacity

- Pentium®M Processor, 1.1 GHz
- 1 GB RAM, 40 GB memory

Operating system

Windows®XP Professional (pre-installed)

Open platform for customer-specific visualization software, e. g. ProTool, WIN CC flexible, etc.

Interface (Basic version)


- 1 x Ex e Ethernet 100/10BaseT (option of optical fibres)
- 1 x Ex e RS422
- 1 x Ex i USB for Ex i memory stick
- 2 x Ex i PS/2 for intrinsically safe keyboard and mouse

Optional interface modules

- 1 x Ex i Supply module for hand-held scanner
- 1 x Ex d USB direct connection (via Ex d socket) e. g. connection through WLAN

Dimensions (width x height x depth)

411 mm x 332 mm x approx. 135 mm

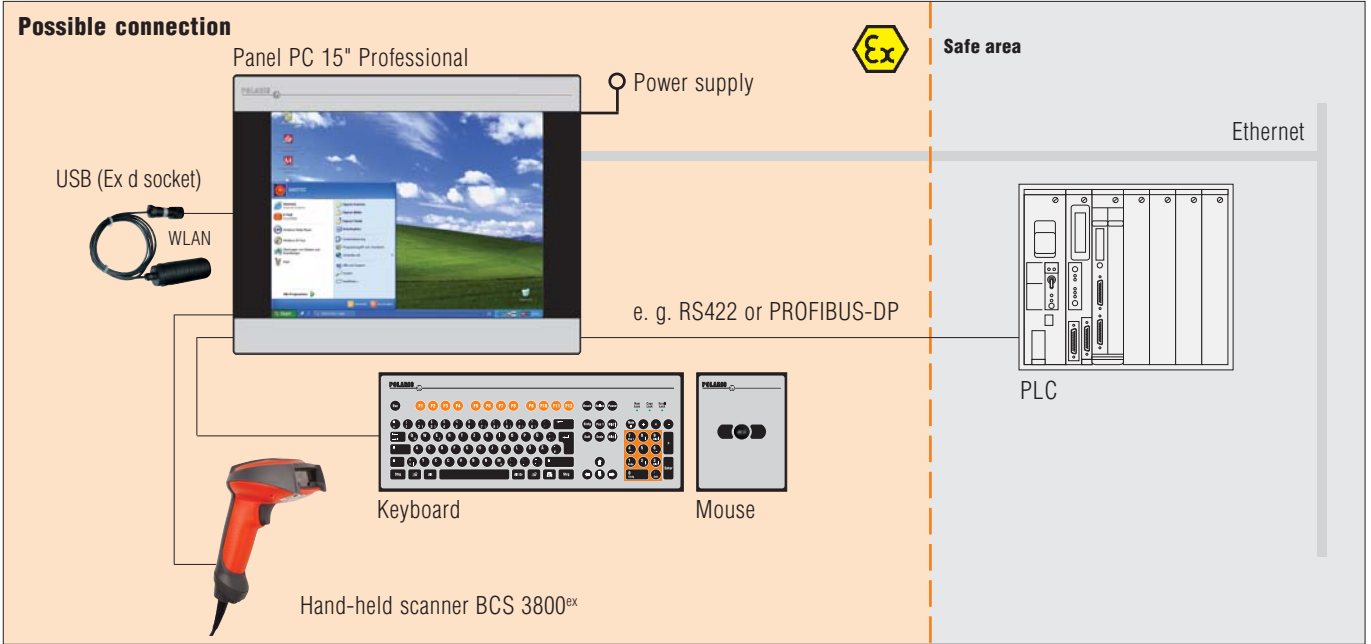

Wall cut-out

394.5 mm x 315.5 mm + 0.5 mm

Weight

approx. 23 kg

Power supply

AC 90 up to 253 V, 50 up to 60 Hz
DC 24 V ± 10 % on request

Max. power consumption

$P_{max} < 70 \text{ W}$

Admissible ambient temperature

Storage -20 °C to +50 °C
Operation 0 °C to +50 °C

System solution with heating on request.

Humidity

5 to 95 % non-condensing

Vibration

0.7 G/1 mm; 5 Hz - 500 Hz pulse in all 3 axes

Shock

15 G, 11 ms pulse in all 3 axes

Material

Front Polyester foil on anodised aluminium plate (conditionally UV-resistant)
Rear panel galvanised sheet steel, bichromated

Selection chart

| Version | Code no. | Interfaces | Code no. |
|---|----------|--|----------|
| Panel PC 15" Professional without touchscreen | 4 | RS422 | 00 |
| | | PROFIBUS-DP | 04 |
| | | RS422, supply module for hand-held scanner | 08 |
| | | PROFIBUS-DP, supply module for hand-held scanner | 12 |
| | | RS232 | 32 |
| | | TTY | 36 |
| Panel PC 15" Professional with touchscreen | 6 | RS232, supply module for hand-held scanner | 40 |
| | | TTY, supply module for hand-held scanner | 44 |
| | | Siemens PROFIBUS-DP/ MPI Interface | 64 |
| | | USB Ex e | 72 |
| | | Further Interface combinations on request | XX |

Complete order no. 17-71V1- [] 0 [] []

Please insert correct code.
Technical data subject to change without notice.
You will find the accessories with order details on the accessories pages.